Light Shed dB 60

Design iGuzzini **iGuzzini**

Last information update: December 2024


Product configuration: RC84
RC84: 596X596 - Sound-absorbent - neutral white - MPO screen UGR<19 - DALI



Product code
RC84: 596X596 - Sound-absorbent - neutral white - MPO screen UGR<19 - DALI

Technical description
596x596 mm luminaire for pendant installation or surface-mounted on a modular grille - LED lamp with high colour rendering index; 4000K neutral white colour tone emission. Body made of thermal insulating, sound-absorbent, 85% recycled polyester fibre material. OEKO-TEX certified, standard 100, class I, hypoallergenic, skin contact safe product. Waterproof, breathable, non putrescible panel. Product with high efficiency LED complete with MPO screen for UGR<19 L<3000 cd/mq α > 65° emission, for use in environments with video monitors in compliance with EN 12464-1. The DALI driver is free to be placed inside the the installation compartment as shown on the instruction sheet. Option of recessed installation in plasterboard ceilings using a frame to be ordered as an accessory. The product can be pendant-mounted using accessories to be ordered separately.

Installation
Surface-mounted on 600x600 mm modular panels. Recessed in plasterboard false ceilings using a frame accessory to be ordered separately. Pendant-mounted using accessories to be ordered separately.



Colour
White (01) | Grey (15) | Blue (16) | Light green (81)

Weight (Kg)
1.9

Wiring
Product complete with DALI components. The electrical cables used are made of a “halogen free” material. (This means that the cables do not contain any halogen materials that in the event of a fire do not emit toxic or corrosive gases and only a small quantity of opaque fumes).

Notes
See graph for acoustic calculation in Documentation Other colours and customised features are available on request.
TPb rated


Complies with EN60598-1 and pertinent regulations

IP20 IP43 On the visible part of the product once installed

Technical data

lm system:	2213	Colour temperature [K]:	4000
W system:	23.5	MacAdam Step:	3
lm source:	3750	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	21	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	94.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	59	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2


Polar

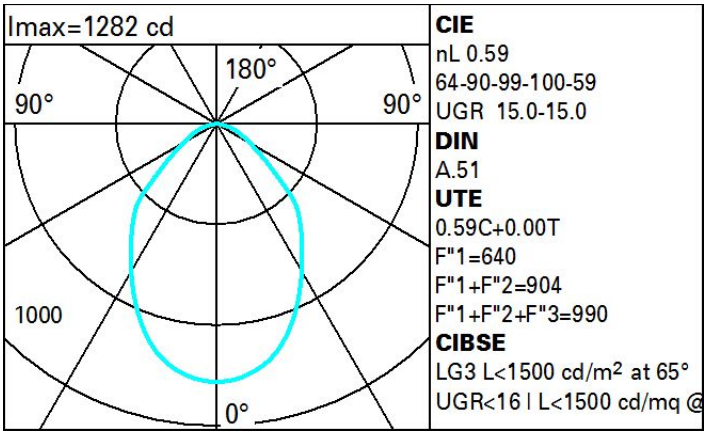

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	43	38	35	32	37	34	34	30	52
1.0	47	42	39	36	42	38	38	35	59
1.5	52	49	46	43	48	45	45	42	70
2.0	55	53	50	48	52	49	49	46	78
2.5	57	55	53	51	54	52	51	49	83
3.0	58	57	55	53	55	54	53	51	86
4.0	60	58	57	56	57	56	55	53	90
5.0	61	59	58	57	58	57	56	54	92

Luminance curve limit

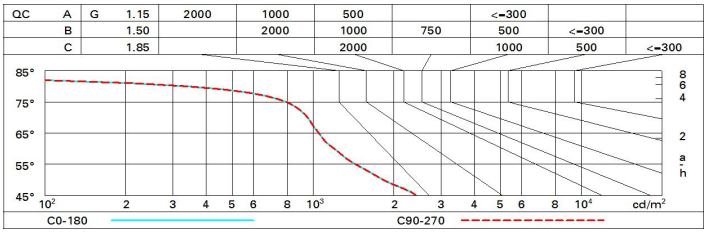

UGR diagram

Corrected UGR values (at 3750 lm bare lamp luminous flux)

Riflect.: ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim				viewed crosswise					viewed endwise		
x	y										
2H	2H	13.3	14.3	13.6	14.6	14.8	13.3	14.3	13.6	14.6	14.8
	3H	14.1	15.0	14.4	15.2	15.5	13.5	14.4	13.9	14.7	15.0
	4H	14.3	15.2	14.7	15.5	15.8	13.6	14.5	14.0	14.8	15.1
	6H	14.4	15.2	14.8	15.5	15.8	13.6	14.4	14.0	14.7	15.1
	8H	14.4	15.1	14.8	15.5	15.8	13.6	14.3	14.0	14.7	15.0
	12H	14.3	15.1	14.7	15.4	15.8	13.6	14.3	13.9	14.6	15.0
4H	2H	13.6	14.5	14.0	14.8	15.1	14.3	15.2	14.7	15.5	15.8
	3H	14.6	15.3	14.9	15.6	16.0	14.8	15.5	15.1	15.8	16.2
	4H	14.9	15.5	15.3	15.9	16.3	14.9	15.5	15.3	15.9	16.3
	6H	15.0	15.6	15.5	16.0	16.4	15.0	15.6	15.4	16.0	16.4
	8H	15.0	15.5	15.5	15.9	16.4	15.0	15.5	15.5	15.9	16.4
	12H	15.0	15.4	15.4	15.8	16.3	15.0	15.4	15.4	15.9	16.3
8H	4H	15.0	15.5	15.5	15.9	16.4	15.0	15.5	15.5	15.9	16.4
	6H	15.2	15.6	15.6	16.0	16.5	15.1	15.5	15.6	16.0	16.5
	8H	15.1	15.5	15.6	15.9	16.4	15.1	15.5	15.6	15.9	16.4
	12H	15.1	15.4	15.6	15.9	16.4	15.1	15.4	15.6	15.9	16.4
12H	4H	15.0	15.4	15.4	15.9	16.3	15.0	15.4	15.4	15.8	16.3
	6H	15.1	15.5	15.6	15.9	16.4	15.1	15.4	15.6	15.9	16.4
	8H	15.1	15.4	15.6	15.9	16.4	15.1	15.4	15.6	15.9	16.4

Variations with the observer position at spacing:

S =			
1.0H	0.5 / -0.6	0.5 / -0.6
1.5H	1.0 / -1.4	1.0 / -1.4
2.0H	2.0 / -1.8	2.0 / -1.8