
RIDE RING


675-10201102406d

RIDE RING SD WALL / CEILING LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005,satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, IP20



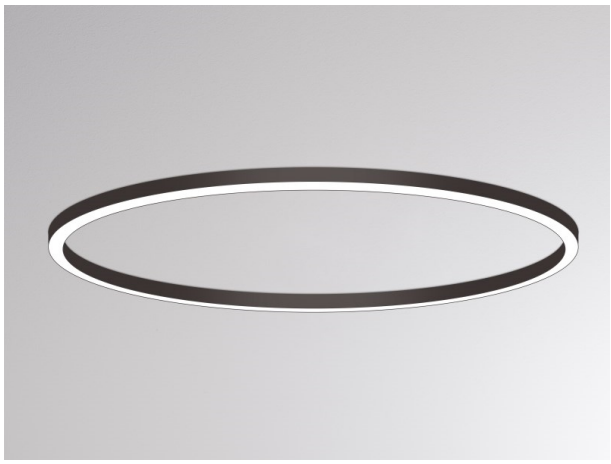


DRAWING

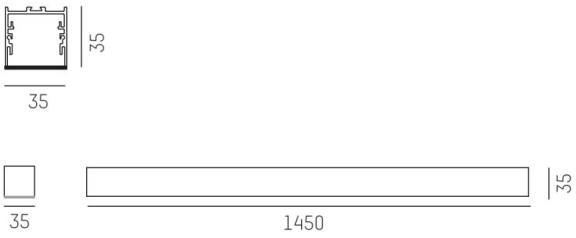

TECHNICAL DETAILS

System perform. [W]	76
Bulb type	LED
Luminous flux [lm]	7470
Current sec. [mA]	500
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA opal diffuser flat
Designer	INHOUSE
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	1451,5
Width [mm]	35
Height [mm]	35
Diameter [mm]	1450
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	14,48
Colour lamp	black
RAL	9005
EAN-Number	9008905918995
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	16

LIGHT DISTRIBUTION CURVE

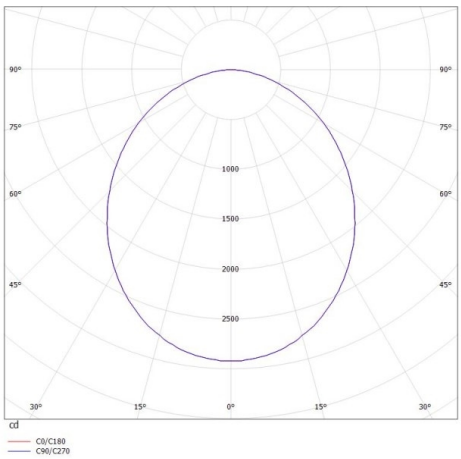

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.