
DARK NIGHT LGP


706-01004554706dv1

DARK NIGHT LGP SDI SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor gold, high-efficiently vacuum deposited aluminium reflector white, beam 40°, light output direct / indirect, UGR <19, with converter, max. 700mA, dimmability: DALI, IP20 separately dimmable



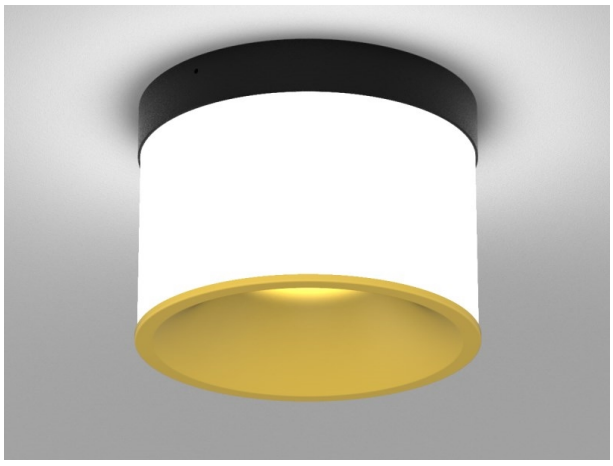


DRAWING

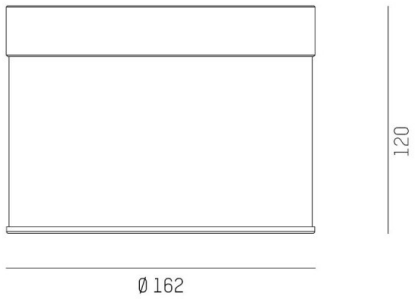

TECHNICAL DETAILS

System perform. [W]	40
Bulb type	LED
Luminous flux [lm]	3480
Current sec. [mA]	700
Colour temp. [K]	3500K
CRI	PREMIUM>90
UGR	<19
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Converter	with converter
Light output	direct / indirect
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	162,9
Height [mm]	120
Diameter [mm]	162
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	1,20
Colour lamp	black
RAL	9005
Colour of glass/shade	white
Colour decor	gold
EAN-Number	9010870111028
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

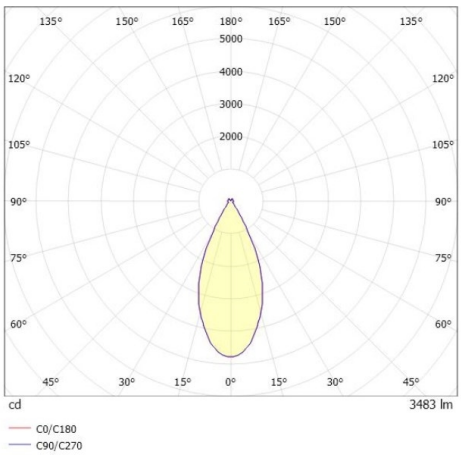

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.