
# **Pina** _Table lamp



Cordless, rechargeable, battery table lamp. A touch control on the base allows you to switch the light on, adjust its intensity and select its color temperature. And thanks to its high IP rating, the lamp can also be used outdoors.(except for models with a metallic-leaf finish which are recommended for continuous outdoor use). An electronic control system monitors and indicates the remaining battery power to ensure recharging is optimized and always performed correctly. The lamp comes with a contact charging base. USB charger included. The lamp can be customized with a floor stand or a ceramic tray that can be purchased separately

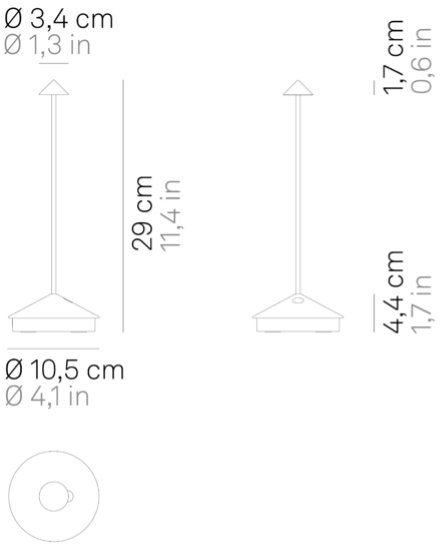


LED | dimmable | IP54

**LD1650**

| | | | | | |
|---|---|---|---|---|---|
| | Corten | **R3** | | White | **B3** |
| | Dark gray | **N3** | | Sand | **S3** |
| | Black | **D3** | | Gold color leaf<br>Not suitable for outdoor use | **BFO** |
| | Silver color leaf<br>Not suitable for outdoor use | **BFA** | | Copper color leaf<br>Not suitable for outdoor use | **RFR** |

**DESIGN IN ITALY BY ZAFFERANO SRL,MADE IN PRC**
Zafferano SRL - Viale dell'Industria, 26 31055 Quinto di Treviso - Italy www.zafferanoitalia.com

The company reserves the right to modify product specifications.
For more information visit www.zafferanoitalia.com

zafferano

# **Pina** _Table lamp

| **Lighting specifications** | |
|---|---|
| source | LED |
| type | SMD |
| total power | 2.2 W |
| power LED | 2.0 W |
| color temperature | 2200 - 2700 - 3000 K |
| lumen lamp | 146 - 171 - 173 lm |
| lumen LED | 178 - 204 - 206 lm |
| beam angle | 44.5° |
| CRI | > 80 |
| class | G |
| dimmer | TOUCH DIMMER |
| motion sensor | NO |

| **Electrical specifications** | |
|---|---|
| classe | 3 |
| supply voltage | 5Vdc max.1A |
| battery | 1 cell li-ion battery pack mod. 18650 3,7v - 2200 ma/h |
| battery life | 12 H. |
| charging time | 6/7 H. |
| driver input | 100-240V |
| driver frequency | 50/60 Hz |

## ACCESSORIES


LD0340RA



6 cm •13.5 cm •4.5 cm •2.2 W
•IP20 • 100-240V• 50/60 Hz

■ Black


LD0350RP



33 cm •51 cm •5.8 cm •2.2 W
•IP20 • 100-240V• 50/60 Hz

■ Black

LD0650RB



Ø 7.5 cm •IP20 • 100-240V
• 50/60 Hz

■ Black