
# **Home Solar** _Floor lamp



Bollard lamp ideal for outdoor use and available in two models: low and high. It has a dark gray or corten painted die-cast aluminum frame and a transparent polycarbonate diffuser. Home Solar is mains-independent and fitted with a solar panel, dusk diffuser. Home Solar is mains-independent and fitted with a solar panel, dusk sensor, motion sensor and stake for installing it directly in the ground. The lamp sensors are controlled by two switches: when the dusk sensor is active and detects an ambient brightness of less than 150 Lux, the lamp switches on at 50% of its intensity. When the motion sensor is active and detects movement, the lamp switches on at full power, and then dims its intensity to 10%. A weighted base offering increased stability can be purchased separately.

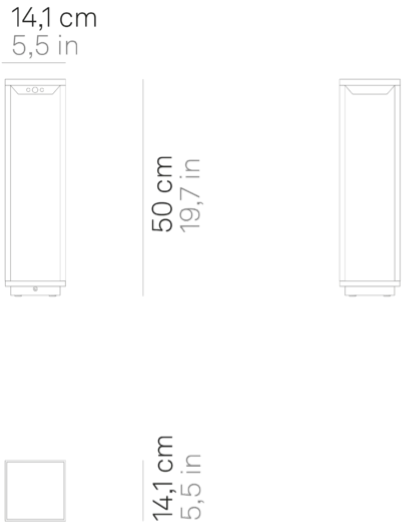


LED | not dimmable | IP54

**LD0256**

| | | | |
|---|---|---|---|
| Corten | **R3** | Dark gray | **G3** |

**DESIGN IN ITALY BY ZAFFERANO SRL,MADE IN PRC**
Zafferano SRL - Viale dell'Industria, 26 31055 Quinto di Treviso - Italy www.zafferanoitalia.com

The company reserves the right to modify product specifications.
For more information visit www.zafferanoitalia.com

zafferano

# **Home Solar** _Floor lamp

| Lighting specifications | |
|---|---|
| source | LED |
| type | SMD |
| total power | 2.2 W |
| power LED | 2.1 W |
| color temperature | 3000 K |
| lumen lamp | 176 lm |
| lumen LED | 415 lm |
| beam angle | 50° |
| CRI | > 84 |
| class | C |
| motion sensor | SI |
| sensore crepuscolare | SI |

| Electrical specifications | |
|---|---|
| classe | 3 |
| supply voltage | DC 3.7V |
| battery | 1 cell li-ion battery pack mod. 18650 3,7v - 2200 ma/h |
| battery life | full light 5/6 H. - microlight 30% 14/18 H. |
| charging time | 6 / 8 H. |

## ACCESSORIES

The company reserves the right to modify product specifications.
For more information visit www.zafferanoitalia.com

zafferano